



XGT7528C-18 S1

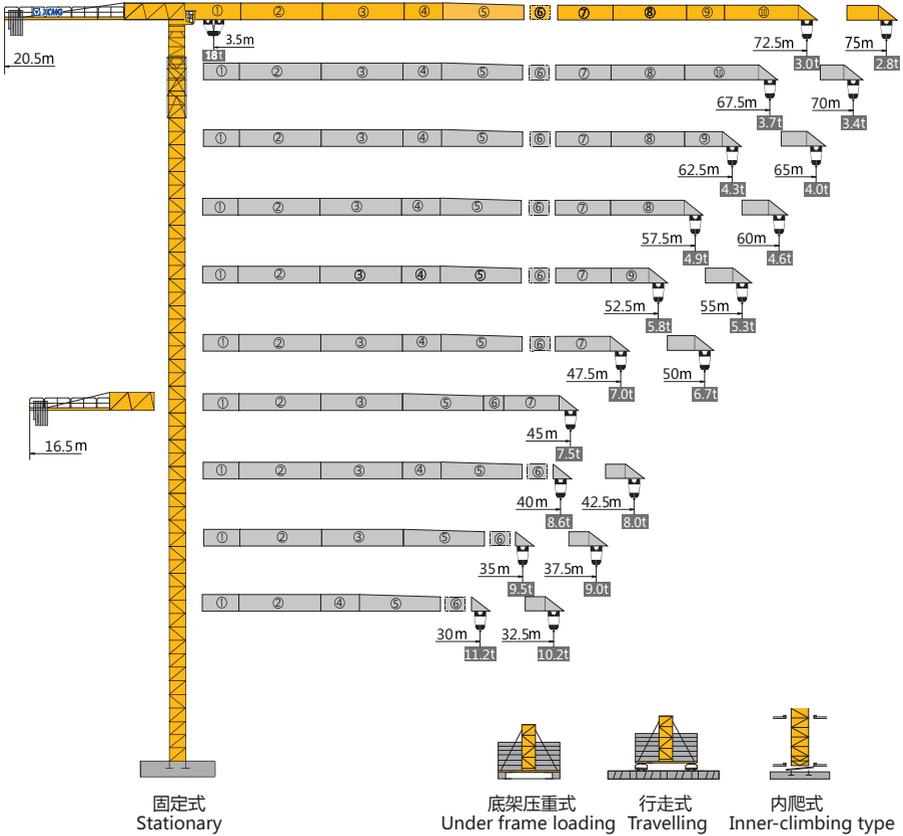

* 可变换的其他安装方式与我们协商 Mounting possibilities Consult us.


平头系列 Topless

塔身与反力 Masts and Reactions

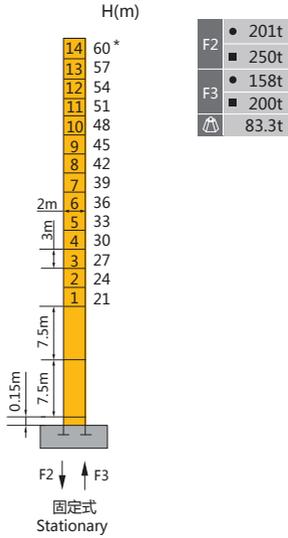

- H(m) 吊钩高度 Height of the hook ● 工作状态反力 Reactions in service ■ 非工作状态反力 Reactions out of service
- ⚠ 独立高度最大臂长的自重 (不含平衡重, 不含压重)
Weight with max free standing, max jib (without counter-jib ballast and load)
 - * 带星号的起升高度表示非工作状态下爬升架应该降下
Hoisting height marked by asterisk means the climbing frame must be lowered for non-service

附着 Anchorages

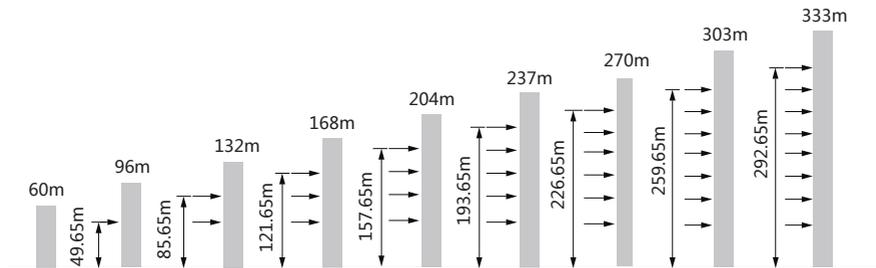

* 如需其他的高度, 请与我们联系。For other heights, consult us please.

起重特性

Load Diagrams

起重臂 吊钩	R _{min}	R(C _{max})	C _{max}	幅度 (m) / 起重量 (kg)														Range(m) / Loading (kg)																				
				5	10	15	20	25	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	57.5	60	62.5	65	67.5	70	72.5	75											
75	⊥	3.5	28.82	9000	9000														8598	7842	7197	6640	6155	5728	5349	5011	4707	4433	4185	3958	3750	3560	3384	3221	3071	2930	2800	
	⊥	3.5	15.05	18000	18000														12902	9877	7893	7137	6492	5935	5450	5023	4644	4306	4002	3728	3480	3253	3045	2855	2679	2516	2366	2225
72.5	⊥	3.5	29.32	9000	9000														8769	7999	7342	6776	6281	5847	5461	5117	4808	4529	4276	4045	3834	3640	3461	3296	3142	3000		
	⊥	3.5	15.30	18000	18000														13162	10083	8064	7294	6637	6071	5576	5142	4756	4412	4103	3824	3571	3340	3129	2935	2756	2591	2437	2295
70	⊥	3.5	31.11	9000	9000														8562	7864	7262	6736	6274	5865	5499	5171	4874	4605	4360	4135	3929	3739	3563	3400				
	⊥	3.5	16.21	18000	18000														14095	10821	8675	7857	7159	6557	6031	5569	5160	4794	4466	4169	3900	3655	3430	3224	3034	2858	2695	
67.5	⊥	3.5	32.02	9000	9000														8851	8132	7511	6970	6493	6071	5695	5356	5051	4773	4521	4289	4077	3881	3700					
	⊥	3.5	16.67	18000	18000														14573	11200	8989	8146	7427	6806	6265	5788	5366	4990	4651	4346	4068	3816	3584	3372	3176	2995		
65	⊥	3.5	32.79	9000	9000														8355	7719	7164	6676	6244	5858	5511	5198	4914	4655	4418	4200	4000							
	⊥	3.5	17.06	18000	18000														14972	11516	9250	8387	7650	7014	6459	5971	5539	5153	4806	4493	4209	3950	3713	3495	3295			
62.5	⊥	3.5	33.40	9000	9000														8534	7886	7321	6823	6383	5989	5636	5317	5027	4763	4521	4300								
	⊥	3.5	17.37	18000	18000														15292	11770	9461	8580	7829	7181	6616	6118	5678	5284	4931	4612	4322	4058	3816	3595				
60	⊥	3.5	33.87	9000	9000														8670	8012	7439	6934	6487	6088	5730	5406	5112	4845	4600									
	⊥	3.5	17.60	18000	18000														15534	11962	9619	8726	7965	7307	6734	6229	5782	5383	5025	4701	4407	4140	3895					
57.5	⊥	3.5	34.18	9000	9000														8761	8097	7518	7009	6558	6155	5793	5466	5170	4900										
	⊥	3.5	17.76	18000	18000														15697	12091	9726	8825	8056	7392	6813	6304	5853	5450	5088	4761	4465	4195						
55	⊥	3.5	34.88	9000	9000														8967	8289	7698	7178	6717	6305	5936	5602	5300											
	⊥	3.5	18.12	18000	18000														16065	12386	9967	9047	8262	7584	6993	6473	6012	5600	5231	4897	4595							
52.5	⊥	3.5	35.91	9000	9000														8567	7958	7422	6948	6524	6143	5800													
	⊥	3.5	18.64	18000	18000														16599	12805	10317	9369	8560	7862	7253	6717	6243	5819	5438	5095								
50	⊥	3.5	38.65	9000	9000														8777	8657	8079	7567	6910	6700														
	⊥	3.5	19.10	18000	18000														17163	13940	11257	10234	9362	8609	7952	7374	6862	6205	6095									
47.5	⊥	3.5	38.86	9000	9000														8406	7843	7420	7000																
	⊥	3.5	19.30	18000	18000														17538	13532	10919	9924	9074	8340	7701	7138	6640	6295										
45	⊥	3.5	38.91	9000	9000														8468	7902	7500																	
	⊥	3.5	19.65	18000	18000														17644	13633	11003	10000	9145	8407	7763	7197	6895											
42.5	⊥	3.5	38.32	9000	9000														8572	8000																		
	⊥	3.5	19.86	18000	18000														17858	13802	11143	10129	9264	8518	7867	7295												
40	⊥	3.5	38.42	9000	9000														8600																			
	⊥	3.5	19.91	18000	18000														17914	13847	11180	10163	9296	8547	7895													
37.5	⊥	3.5	37.50	9000	9000														8700																			
	⊥	3.5	20.20	18000	18000														14078	11371	10340	9459	8700															
35	⊥	3.5	35.00	9000	9000														8800																			
	⊥	3.5	20.26	18000	18000														14135	11418	10383	9500																
32.5	⊥	3.5	32.50	9000	9000														8900																			
	⊥	3.5	19.97	18000	18000														17974	13894	11219	10200																
30	⊥	3.5	30.00	9000	9000														9000																			
	⊥	3.5	19.94	18000	18000														17944	13871	11200																	

配重配置 Counter-jib Ballast

配重配置 Counter-jib Ballast		3320-1880		
 (m)	 (m)	 (kg)	PZ3320	PZ1880
75	20.5	18480	5	1
72.5	20.5	18480	5	1
70	20.5	16600	5	0
67.5	20.5	16600	5	0
65	20.5	16600	5	0
62.5	20.5	16600	5	0
60	20.5	16600	5	0
57.5	20.5	15160	4	1
55	20.5	15160	4	1
52.5	20.5	15160	4	1
50	20.5	15160	4	1
47.5	20.5	15160	4	1
45	16.5	18480	5	1
42.5	16.5	18480	5	1
40	16.5	16600	5	0
37.5	16.5	15160	4	1
35	16.5	15160	4	1
32.5	16.5	15160	4	1
30	16.5	13280	4	0

传动机构 Mechanisms

传动机构 Mechanisms	图例 Legend	型号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率 (kW) Power
起升 Hoisting		55LVF45AE	 0-34	9	805 >805*	55
			 0-68	3		
			 0-100	1.5		
			 0-17	18		
			 0-34	6		
			 0-50	3		
变幅 Trolleying		8DVF8	0-80m/min			7.5
回转 Slewing		15RVF	0-0.7r/min			2×7.5
行走 Travelling		RT	0-17m/min			4×5.2
电源 Main Supply				~ 380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)				77.5kW		

★ 如需其他配置, 请与我们联系。 For other configuration, consult us please.

此样本所列技术参数不受法律约束, 具体请详见相应产品说明书。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.